



SG3500

Omnidirectional mast/bracket mount collinear IoT/Wireless data/ C-band 5G 3.4-3.6 GHz



The SG3500 omnidirectional C-band 5G wireless data collinear can be used as a 5G mobile phone improvement in partnership with a CEL-FI GO stationary or CEL-FI-GO mobile unit or for wireless data transfer applications.

Mounting hardware, adaptors, coaxial cable and installation accessories are all available separately.

Construction	White fibreglass radome, internal PCB, aluminium mount ferrule and side exit cable assembly
Frequency range	3.4-3.6 GHz - N78, C-band 5G
Bandwidth	Full frequency range stated - 200 MHz
VSWR	<1.8:1
Tuning	Factory
Gain	6.0 dBi
Impedance - nominal	50 Ohms
Maximum power	20 Watts
DC grounding	Yes
Polarisation	Vertical
H Plane	360° omni-directional
E Plane	21°
Connector	SMA male fitted as standard, or specify requirements
Cable	500mm RU240-UF side exit from ferrule or specify requirements
Height	340mm
Weight	179grams
Projected area	0.006m ²
Wind load at 160kph	0.766kg, 0.008kN
Temperature range	-10°C - +60°C
Mounting hardware order separate	Bracket: GM1, GM6, A-6211, A-4115 or A-4115-2 Bracket mount: BBM-SS, BBML-SS, BBMXL-SS or BBKB-B Magnetic base: MGB Alternate spring base: A-1269, A-1269-14 or A-1270
Mounting position recommended	Mount as high on your building or tower as possible using a minimum 12.7mm hole or appropriate bracket
Installation tools required	19mm or 3/8" spanner for securing nut



SMA male fitted as standard or specify requirements



1/2"-12BSW threaded base with nut+washer, requires 12.7mm hole




SG3500

Omnidirectional mast/bracket mount collinear
IoT/Wireless data/ C-band 5G 3.4-3.6 GHz




Improved Product

Australian
manufactured
in
East Gippsland

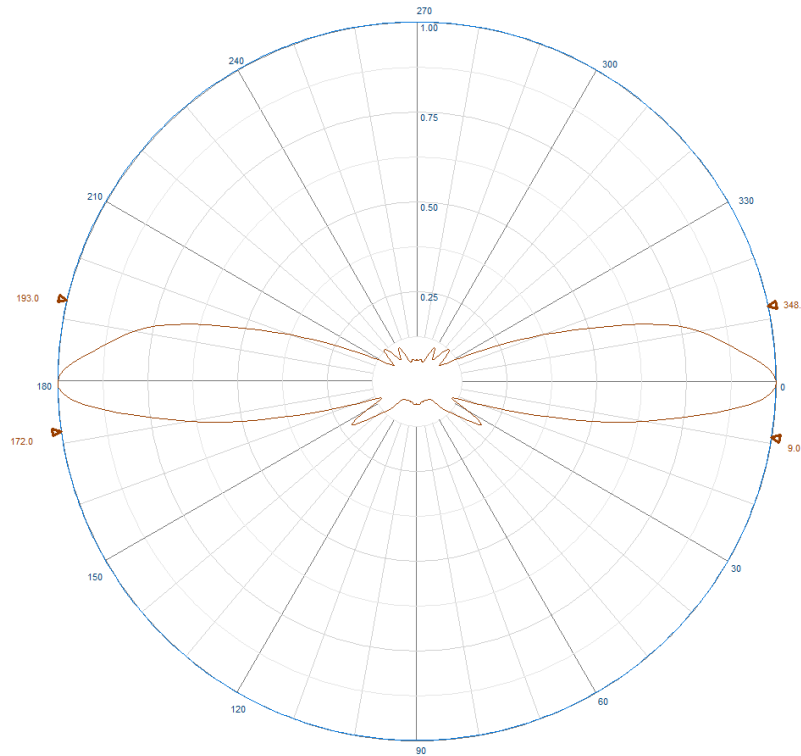

Example polar radiation pattern

S11 SWR 1.000 / Ref 1.000 [F1 M]

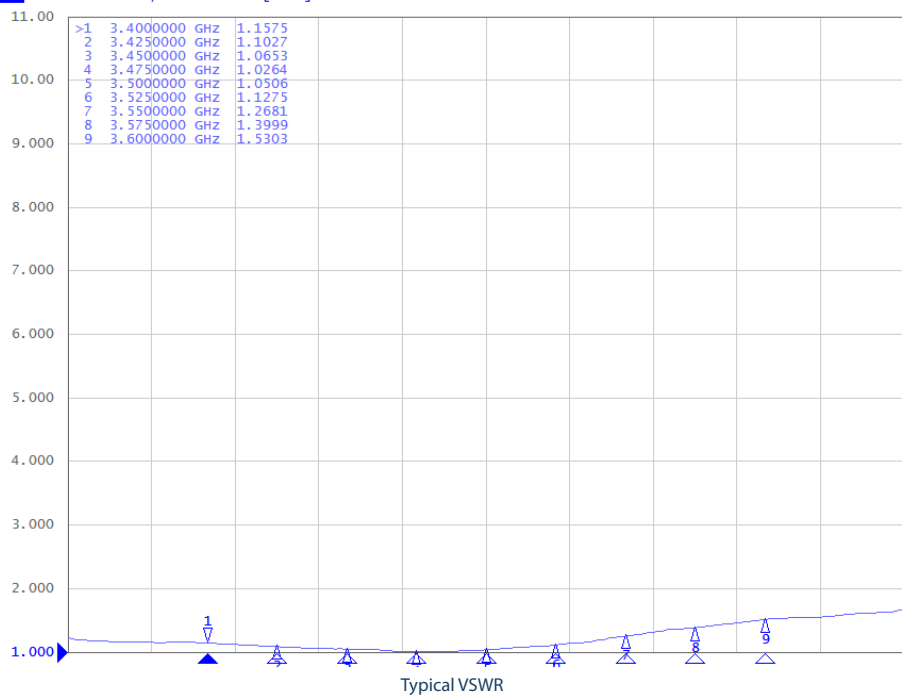

Typical VSWR



SG3500

Omnidirectional mast/bracket mount collinear IoT/Wireless data/ C-band 5G 3.4-3.6 GHz

Improved
Product


Australian
manufactured
in
East Gippsland

Build
To
Order



SKU: A-4266
Aluminium mast mount adaptor

Requires 2 x EB1-SS, 1 x UB3-SS
or 2 x RB8 or 1 x UB2-SS
Can be used with CFB series or
A-2654-2



SKU: GM1
304 stainless steel 'L' fascia
mount bracket
16mm hole
Requires mounting screws/
bolts - not supplied



SKU: BBKB-B
'Knock-down' antenna mount,
powder coated black

17mm mount hole with cable
slot



SKU: BBM-SS (30-50mm)
SKU: BBML-SS (55-65mm)
SKU: BBMXL-SS (50-76mm)
304 stainless steel 'wrap
around' mounting bracket
16mm hole



SKU: MRM-SS
304 stainless steel 'clamp'
mounting bracket
20-25mm capability
16mm hole



Alternative Mounting
SKU: A-1269
heavy-duty 'barrel' spring base
SKU: A-1270
heavy-duty parallel spring base
Can be fitted during
manufacture



SKU: A-2845
Powdercoated black tri-
magnetic mount base
13mm hole
Santoprene coated magnets
for scratch reduction




SKU: MGB
Powdercoated black internal
magnet mount base
16mm hole
105mm diameter
includes scratch reduction pad
on base




SKU: CFB** series**
Galvanised steel 'J' hockey stick
brackets, 1.1 - 2.7 metres.

Requires A-4266 series + 2 x
EB1-SS or 1 x UB2-SS



SKU: A-6211
304 stainless steel 'L' fascia
mount bracket
16mm hole, 200mm offset
Requires mounting screws/
bolts - not supplied



SKU: A-2654-2
Aluminium pole extension 1.1
metres includes pole mounting
brackets.

Requires A-4266 + 2 x EB1-SS
or 1 x UB2-SS



NBS Masts & Accessories
- Aluminium telescopic masts
- Tilt-over masts
- Lattice section masts

Contact us for more info.