

## Section 3 Section 3 Vehicle Mount of o



### ZN4-77-06

## Heavy-duty fibreglass whip and barrel spring base UHF CB Radio 477 MHz



The ZN4-77-06 ground independent UHF CB Radio antenna is a lightweight antenna which delivers excellent performance and medium gain. The ZN4-77-06 suits more medium to heavy-duty terrain, for light-medium duty applications see the ZN4-77-06S.

The ZN4-77-06 is suitable for all radios on the market with a UHF female jack antenna connection.

Mounting hardware, connectors and other installation accessories are all available separately.

| Construction                     | Black heatshrunk fibreglass whip, delrin and chrome feed base, 'barrel' spring base, threaded stud mount, external cable, termination and adaptor |
|----------------------------------|---|
| Frequency range                  | 477 MHz - UHF CB Radio  |
| Bandwidth                        | 476.4125 - 477.4125 MHz - all 40/80 channels  |
| VSWR                             | <1.5:1  |
| Tuning                           | Factory   |
| Gain                             | 6.6 dBi - suits mostly flat to mild hilly terrain   |
| Maximum power                    | 50 Watts  |
| Impedance                        | 50 Ohms   |
| Polarisation                     | Vertical  |
| H Plane                          | 360° omnidirectional  |
| Cable                            | 4.5 metres RG58 low loss - bottom exit from sping base  |
| Connector                        | FME female fitted to cable for ease of installation   |
| Adaptor - supplied               | FME male to UHF male PL259  |
| Height                           | 950mm   |
| Weight                           | 700grams  |
| Mounting hardware order separate | Bullbar: BBM-SS, BBMXL-SS or BBKB-B<br>Truck Mirror: MRM-SS<br>Bracket Mounting: GM1, GM2, GM6  |
| Mounting position recommended    | As high on your vehicle/structure as possible using a minimum 13mm hole or appropriate bracket with a 13mm hole                                   |
| Installation tools required      | 18mm spanner for split nut securing   |







FME female jack connector fitted to cable



FME male to UHF Male PL259 adaptor




# Section 3 Section 3 Vehicle Mount




### ZN4-77-06





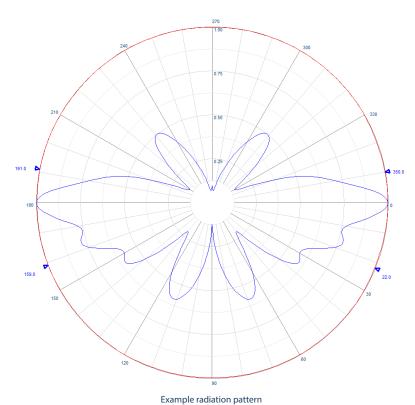



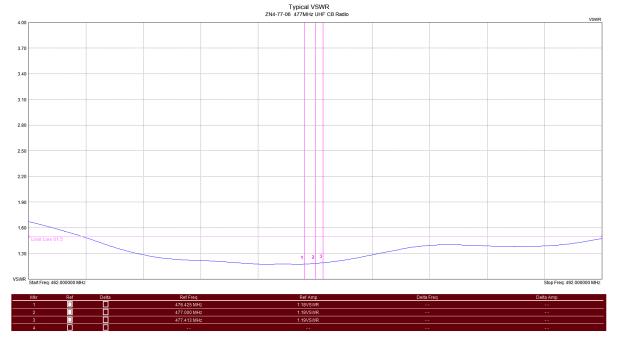

Typical VSWR





## Section 3 Section 3 Vehicle Mount 5



### ZN4-77-06

## Heavy-duty fibreglass whip and barrel spring base UHF CB Radio 477 MHz



#### Recommended installation accessories



#### SKU: BBM-SS

Wrap around bull bar mount, up to 30-50mm diameter bull bar tube

16mm mount hole

Requires 10mm spanner



#### SKU: ATLM-B

Adjustable bonnet, boot and door jam mount. 360 rotational and 140 degree adjustment 16mm mount hole Includes 5mm and 2mm allen

keys



#### SKU: MRM-SS

304 stainless steel clamp style mirror mount 16mm mount hole Requires 10mm spanner



#### SKU: GM2

304 stainless steel 'Z' mount bracket 16mm mount hole



#### SKU: BBMXL-SS

Wrap around extra large bull bar mount, up to 76mm diameter bull bar tube

16mm mount hole

Requires 10mm spanner



#### SKU: BBKB-B

Knock-down antenna mount, powder coated black

16mm mount hole with 5.5mm cable hole



#### SKU: GM1

304 stainless steel 'L' mount bracket 16mm mount hole



#### SKU: A-6211

304 stainless steel offset mount bracket, 200mm offset 16mm mount slot

Year

anufacture Warranty



# Section 3 Yehicle Mount



### ZN4-77-06





