



ZYUE-4GLTE series


Mobile phone/Wireless data improvement pivot whip

4G LTE, 4G, 3G and ISM2.4/WiFi



The ZYUE-4GLTE series of whips has the ability to be either set straight, or on a 90 degree bend for those space saving requirements. Suitable for 4G LTE, 4G, 3G and WiFi applications.

Adaptors, patch leads, water proofing and other installation accessories are all available separately.

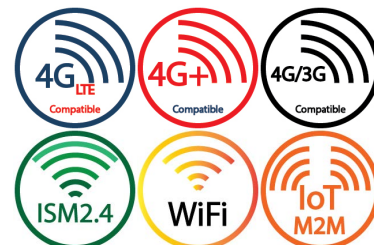

	ZYUE-4GLTE-001	ZYUE-4GLTE-N001
Construction	Black moulded whip, 90 degree swivel chrome connector	
Frequency range	4G LTE, 4G, 3G and ISM 2.4/ WiFi 704-960MHz & 1710-2690MHz	
Bandwidth	Full frequency range	
VSWR	<2.0:1	
Tuning	Factory	
Gain	4.5dBi	5dBi
Impedance	50 Ohms	
Maximum power	10 Watts	
Connector as base	SMA male plug connector as base	
Polarisation	Linear	
H Plane	360° omni-directional	
Dimensions	Height: 87.5-105mm Diameter: 9.4mm Width: 27mm	Height: 144-182mm Width: 30mm Depth: 16.3mm
Mounting	SMA male fits to any SMA female terminated device	
Operating temperature	-20°C to +65°C	-40°C to +80°C
Mounting position recommended	Mount as high as possible, if using on a hand-held device, ensure device is not enclosed within metallic material or within a metallic lined structure.	



ZYUE-4GLTE-001



ZYUE-4GLTE-N001