



SM-8211

SMA male crimp connector
For RU240-UF and RU240 cable


In-stock
Ready to
Ship

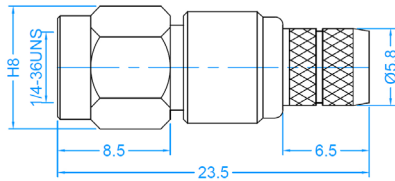

Interface	According to IEC 60169-15, MIL-C-39012, CECC 22110
Frequency range	DC - 3 GHz
VSWR	≤1.2:1
Impedance	50Ω (Ohms)
Withstanding voltage	≥1000V R.M.S.
Insulation resistance	≥5000 MΩ
Working voltage	<335V R.M.S.
Contact resistance	Centre Contact - ≤3.0mΩ Outer Contact - ≤2.5mΩ
Durability	≥500 mating cycles
Temperature range	-65°C to +165°C
Compatible coaxial cable	SKU: 7876-2 : RU240-UF - Low loss, ultra flexible, stranded core, solid PE dielectric, black UV stabilised jacket

Construction

Body	Gold plated brass
Insulator	PTFE (teflon)
Centre contact	Gold plated brass
Ferrule	Gold plated brass
Gasket	Silicon rubber



RU240-UF
SKU: 7876-2
500m roll