



SGL477 Series

Light to medium-duty parallel spring base collinear UHF CB radio 477MHz



The SGL477 series is a light to medium-duty UHF CB radio antenna designed for vehicle mounting on small 4WD's, utes or cars. The SGL477 series are suitable for all UHF CB radios on the market with UHF female input connection.

The SGL477 series are identical in appearance with the SGLDB mobile phone series and SGL1100 AM/FM series.

Mounting hardware, adaptors, connectors and other installation accessories are all available separately.

Order codes	SGL477-B - Black radome and electro-polished stainless steel spring SGL477-W - White radome and electro-polished stainless steel spring
Construction	Coloured fibreglass radome, aluminium ferrule, parallel spring base and coaxial cable assembly
Frequency range	477 MHz - UHF CB Radio
Bandwidth	476.4125 - 477.4125 MHz - covering all 40/80 channels
VSWR	<1.5:1
Tuning	Factory
Gain	2.1 dBi - suits hilly terrain or CBD locations
Maximum power	20 Watts
Impedance	50 Ohms
Polarisation	Vertical
H Plane	360° omnidirectional
Cable	5 metres RG58A/U stranded, bottom exit from spring base
Connector	UHF male PL259 solder pin twist-style connector supplied, not fitted
Height	750mm
Weight	650grams
Mounting hardware order separate	Bullbar: BBM-SS, BBML-SS, BBMXL-SS or BBKB-B Truck Mirror: MRM-SS Bracket Mounting: GM1, GM2, GM6, ATLM series
Mounting position recommended	As high on your vehicle/structure as possible using a minimum 16mm hole or appropriate bracket with a 16mm hole
Installation tools required	21mm spanner for base nut securing




UHF male PL259 connector supplied not fitted




SGL477 Series

Light to medium-duty parallel spring base collinear
UHF CB radio 477MHz

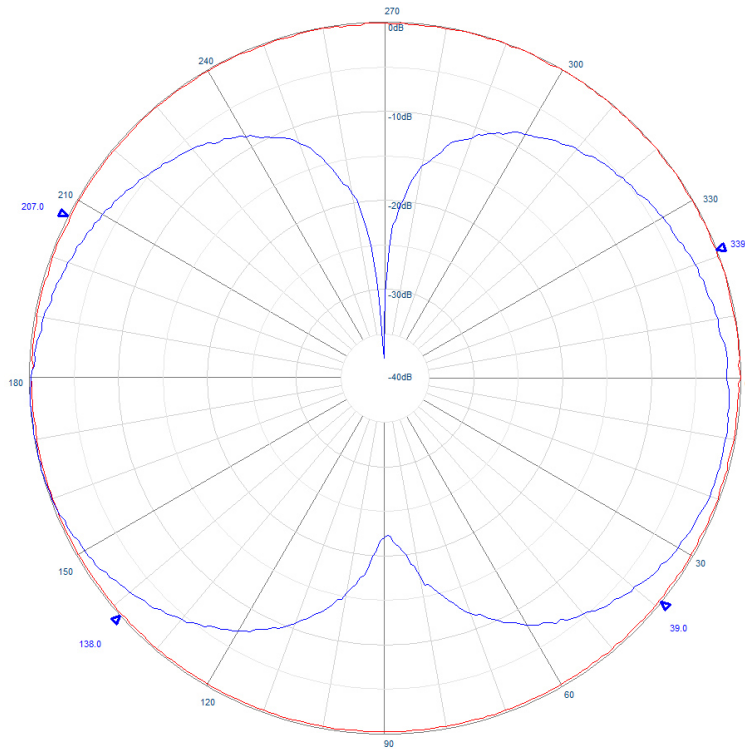

Example radiation pattern

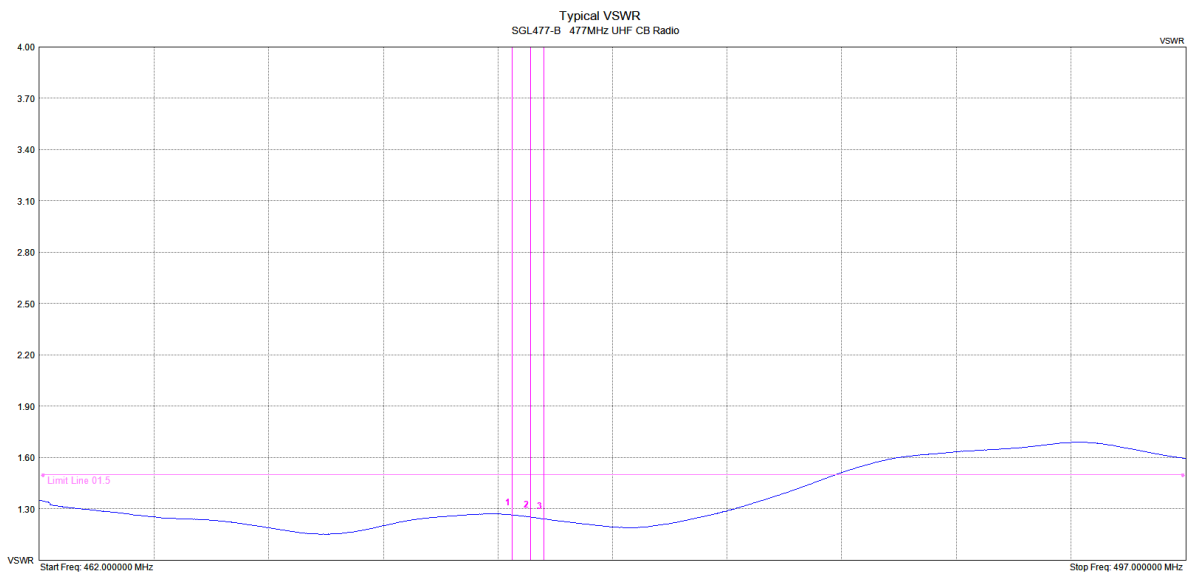

Mtr	Ref	Delta	Ref Freq	Ref Amp	Delta Freq	Delta Amp
1	<input type="checkbox"/>	<input type="checkbox"/>	478.425 MHz	1.280 VSWR	--	--
2	<input type="checkbox"/>	<input type="checkbox"/>	477.000 MHz	1.280 VSWR	--	--
3	<input type="checkbox"/>	<input type="checkbox"/>	477.413 MHz	1.240 VSWR	--	--
4	<input type="checkbox"/>	<input type="checkbox"/>	--	--	--	--

Typical VSWR



SGL477 Series

Light to medium-duty parallel spring base collinear UHF CB radio 477MHz

Recommended installation accessories






SGL477 Series

Light to medium-duty parallel spring base collinear

UHF CB radio 477MHz

 In-stock
Ready to Ship

Vehicle Mounting locations

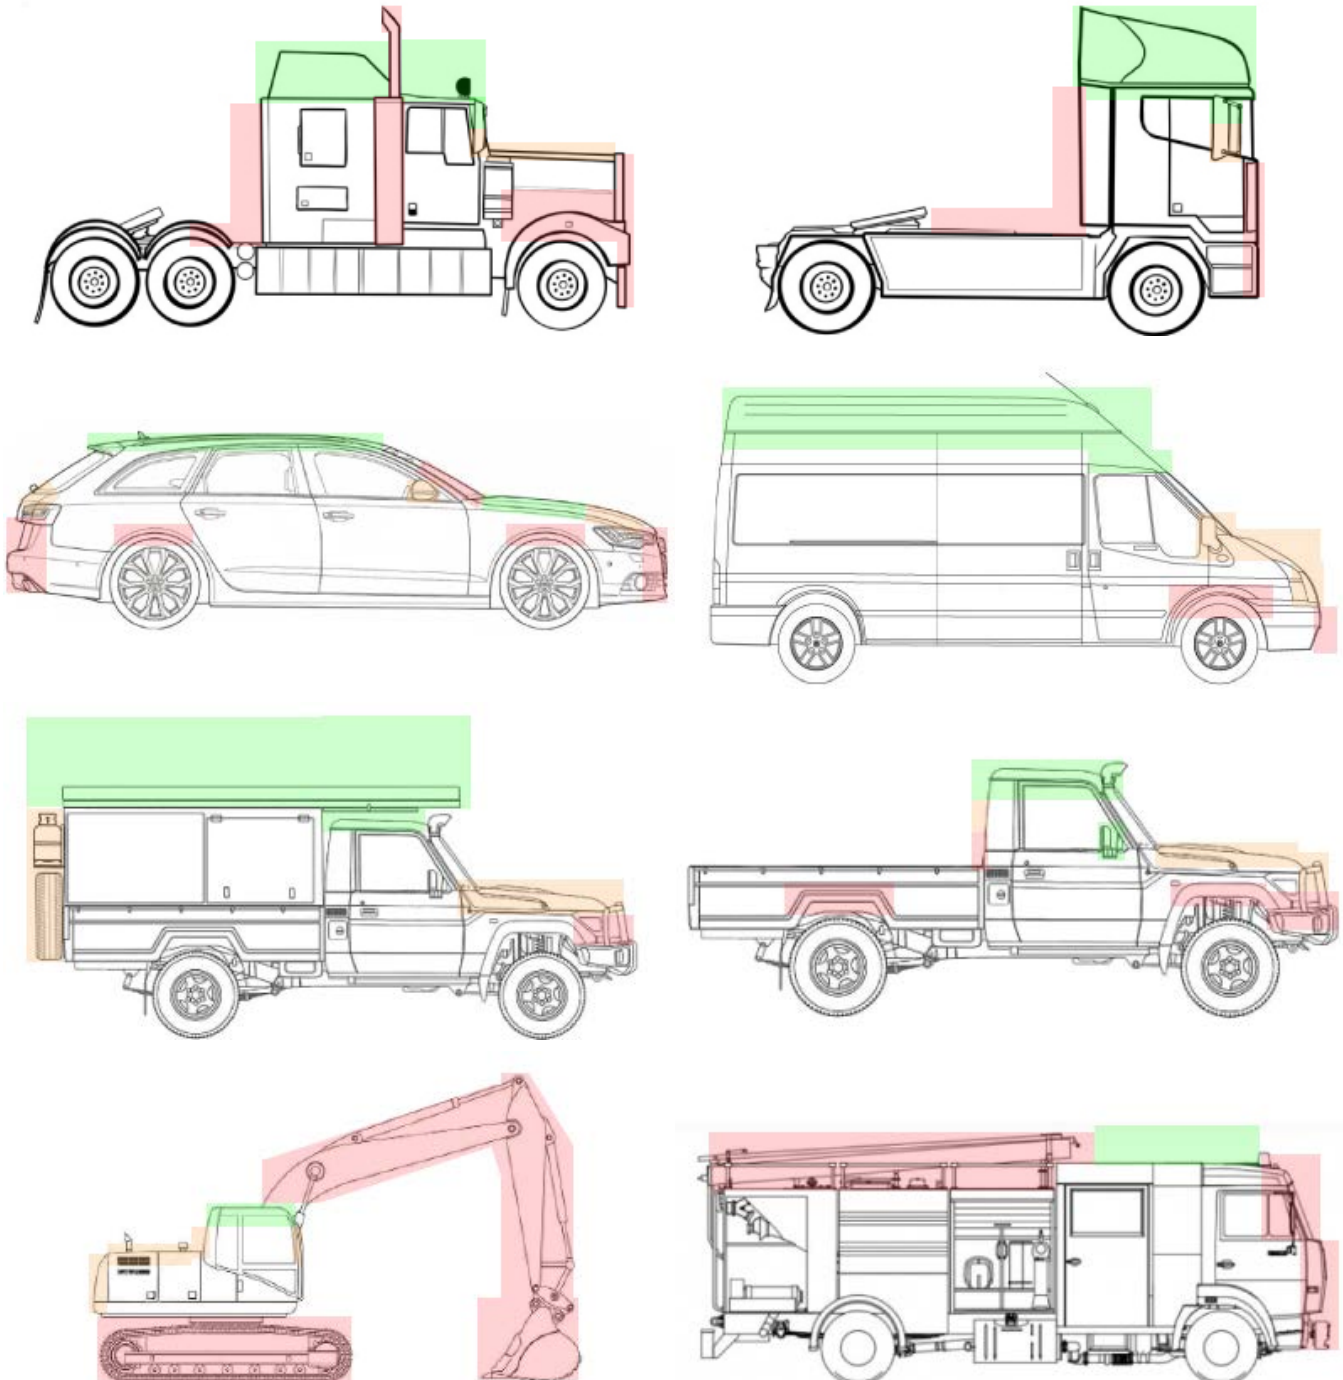

- Best/Recommended location for mounting
- Suitable mounting locations
- Not suitable mounting locations